




PJ - Air Jet - Combined hammer blasts



OVERALL DIMENSIONS				
Model	A	B	C	ØD
	mm	mm	mm	mm
PJ 40	130	220	306	170
PJ 63	160	260	363	222
PJ 80	200	308	435	280

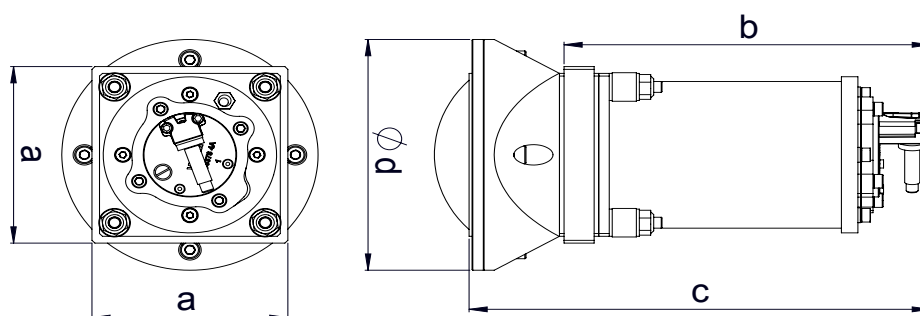

FEATURES								
Model	Energy	Force	Energy	Force	Air Consumption		i Ø Pipe	Air Inlet
	J	N	J	N	NL		mm	BSPP
	3 bar		6 bar		3 bar	6 bar		
PJ 40	8.4	199	18.1	429	3.6	5.3	6	1/8" BSPP
PJ 63	28.8	589	62	1268	6.4	11.6	8	1/4" BSPP
PJ 80	59.2	846	153	2186	12.5	21	8	1/4" BSPP

PJ - AIR JET - COMBINED HAMMER BLASTS

APPLICATION Hopper and silo

POWDER Fine and dust

PROBLEM SOLVING Bridge and rat-holing

FEATURES

DUTY CYCLE Discontinuous

WORKING PRESSURE From 3 bar to 6 bar (from 43 psi to 87 psi)

PNEUMATIC CIRCUIT Filter + flow control valve

AIR SUPPLY QUALITY Class 5.4.1.

WORKING TEMPERATURE From -20°C to 80°C (from -4°F to 176°F)

MAX NOISE LEVEL 125 dB(a)

TECHNOLOGY Single impact + high pressure blast

MATERIAL Steel body, nylon base, steel attachment plate, PS040-063 nylon (PS080 aluminium) head

OPTIONS

TIMER Adjustable from 30sec to 45min

MULTI-TENSION COILS From 24V (ac/dc) to 230V

FULLY PNEUMATIC KIT Available